

KP-20





900-928MHz Omnidirectional Antenna

Specifications:

- 900-928MHz
- Gain: 9.2dBi
- -3dB Beamwidth: 10 degrees
- Length: 96 inches
- Weight: 2lb 8oz (inc brackets)
- Max Power: 100 watts
- VSWR: 1.5:1 or less
- Max wind survival: 112 MPH
- Wind Load: 47 sq in/.32 sq ft
- Mast req'd 1.25—2.50 inches
- Connector: Integral N-female
- Radome: One piece UV stabilized fiberglass
- Mounting hardware included

Vertical radiation pattern

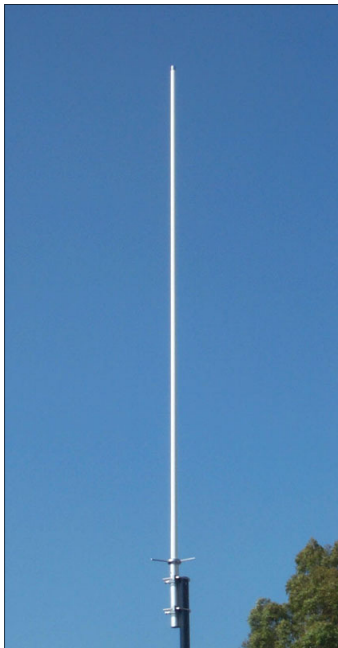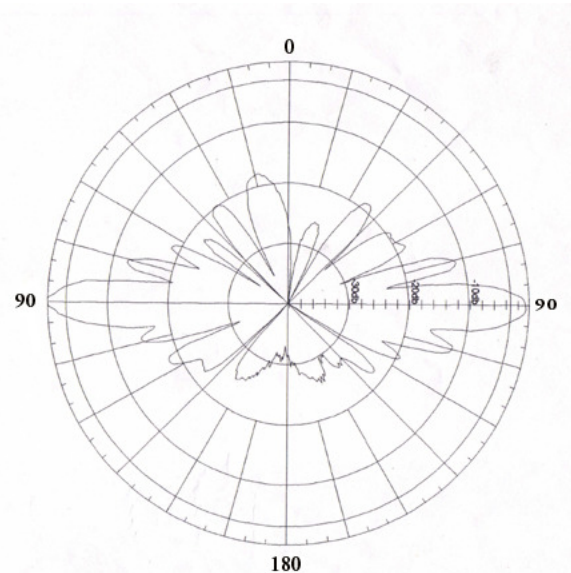

FEATURES:

- High gain omnidirectional pattern for long-range communications
- Heavy duty, one-piece fiberglass radome, 112 MPH wind survival
- Mounting pipe acts as a shroud, protecting the coax to antenna connection from moisture/wind etc.
- Extruded aluminum brackets and stainless steel hardware included
- Ideal for the license free 900MHz ISM band



NCG Company
15036 Sierra Bonita Lane
Chino, CA 91710
Phone: 800.962-2611 909-393-6133
Fax: 909-393-6136
email: sales@natcommgroup.com

