


# CHV-5X



Five-band 40/20/15/10/6 Meter rotatable dipole

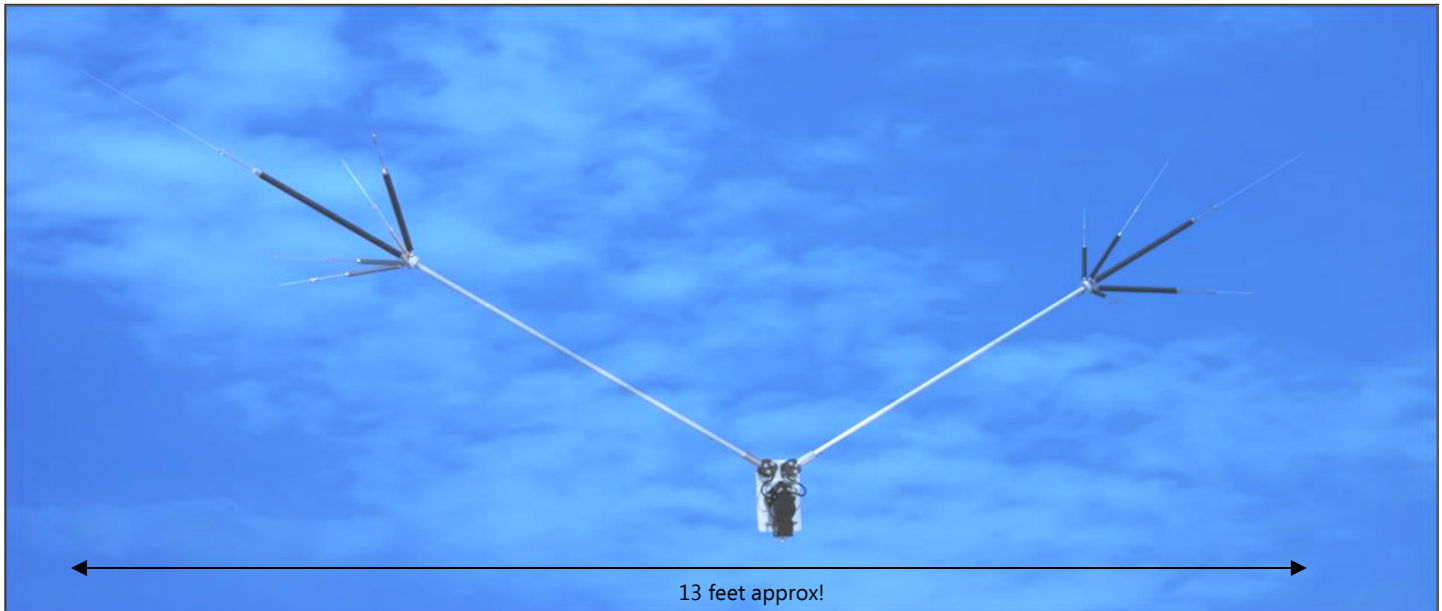

## Specifications

- 7, 14, 21, 28, 50MHz (40/20/15/10/6M bands) center fed 1/2 wave dipole
- Each band independently tunable
- VSWR: Less than 1.2:1 at center freq
- Impedance: 50 Ohm
- CBL-2500 2.5kW Balun included
- Length when assembled in horizontal configuration: Approx 13 feet
- Max Power: 40/20M 150W SSB  
15/10/6M 220W SSB
- Weight: 5 lb 14 oz
- Max Wind Survival: 92MPH
- Mast Required: 1.00 - 2.5 inch diameter
- Rotation radius: 7 feet (approx)
- Connector: SO-239
- Construction: Aluminum elements, heavy duty mounting plate, mounting hardware included.

## FEATURES

- Multi-band operation in a very compact, very lightweight design. Patio, balcony, attic, etc...installation possible by one person.
- Easy assembly in either a "V", "horizontal" or ground plane configuration. Mounting plate has pre-drilled holes to orient the antenna in either a horizontal or "V" (120deg) shape dipole, or as a ground plane
- Each coil has a tuning stub to set the SWR independent of the other bands.
- Stainless steel U-bolts and hardware.
- Very portable, easy to set-up and disassemble



NCG Company 15036 Sierra Bonita Lane Chino, CA 91710  
Phone: 800-962-2611 909-393-6133 Fax: 909-393-6136  
email: [sales@cometantenna.com](mailto:sales@cometantenna.com)